

# Owner's Manual

## 10,000mAh Fast-Charging Portable Wireless Charging Power Bank with Dual USB Ports

Model: UPB-10K0-1U1CQ

Este manual esta disponible en español en la página de  
Tripp Lite: [tripplite.com/support](http://tripplite.com/support)

Ce manuel est disponible en français sur le site Web de  
Tripp Lite : [tripplite.com/support](http://tripplite.com/support)

Русскоязычная версия настоящего руководства представлена на  
веб-сайте компании Tripp Lite по адресу: [tripplite.com/support](http://tripplite.com/support)

### WARRANTY REGISTRATION

Register your product today and be automatically entered  
to win an ISOBAR surge protector in our monthly drawing!

[tripplite.com/warranty](http://tripplite.com/warranty)



Manufacturing  
Excellence.

1111 W. 35th Street, Chicago, IL 60609 USA • [tripplite.com/support](http://tripplite.com/support)

Copyright © 2020 Tripp Lite. All rights reserved.

## Product Features

- Wirelessly charges mobile devices (up to 10W) when plugged into a power source or as a 10,000mAh portable battery pack
- Universally compatible with all Qi-certified smartphones\* and devices\*
- Charges up to 2 wired devices simultaneously or charges 1 device wirelessly
- Provides nearly 2 full charges to a Qi-compatible smartphone or 10 full charges to a smart watch
- USB-C port supports an input of 5V/2A or 9V/1.1A, and output of 5V/3A
- USB-A port supports an output of 5V/2A
- Supports short circuit, overheat, overcurrent, overvoltage and overcharging protection to help extend the life of your devices
- Thin profile design fits easily inside a small bag, purse or pocket

\* Compatible with Apple iPhone XS Max/XR/XS/X/8/8 Plus and Samsung Galaxy S10/S10 Plus/S10E/S9/S9 Plus/S8/S8 Plus/Note 9/Note 8/S7/S7 Edge/S6 Edge Plus/Note 5.

## Package Includes

- UPB-10K0-1U1CQ
- USB 2.0 Type-C to Type-A Cable, 3 ft. (0.9 m)
- Owner's Manual

## Optional Accessories

- U040-C03-C USB 2.0 Type-C to Type-C Cable, 3A, USB-IF Certified, 3 ft. (0.9 m)
- M100-006-BK USB Sync/Charge Lightning Cable, 6 ft. (1.8 m)
- U050-003-GY-MAX Heavy-Duty USB 2.0 Type-A to Micro-B Cable, 3 ft. (0.9 m)

# Power Bank Charging Instructions

## Notes:

- Before charging any devices, first fully charge the wireless power bank.
- When charging the power bank, the LEDs will illuminate to indicate the battery capacity level (see table below):

LED Status	Power Bank Battery Capacity
●●●●○	100%
●●●◎○	75% - 99%
●●◎○○	50% - 74%
●◎○○○	25% - 49%
◎○○○○	1% - 24%

● = LED Illuminated

○ = LED Off

◎ = LED Flashing

1. Using the included USB 2.0 Type-C to Type-A cable, connect the USB-C port on the power bank to an appropriate USB-A port on your computer or USB wall charger.
2. The power bank will begin charging, with the LEDs operating per the above notes and table.

**Note:** The Smart LED (the 5th LED on the power bank) will illuminate solid red, indicating wireless charging is available. If a compatible wireless device is placed on the charger, the Smart LED will blink blue.

# USB Device Charging Instructions

## Notes:

- Before charging your devices for the first time, first fully charge the power bank.
- Maximum output between the USB ports (Type-C and Type-A) is 5V/3A.
- When charging a USB device, the LEDs will illuminate to indicate the battery capacity level (see table below):


LED Status	Power Bank Battery Capacity
●●●●○	100%-75%
●●●○○	74%-50%
●●○○○	49% - 25%
●○○○○	24% - 1%
○○○○○	0%

● = LED Illuminated

○ = LED Off

## USB Device Charging Instructions

1. Using the included USB Type-C cable or a USB cable suitable for your device, connect your mobile devices to the USB A and/or USB-C ports on the power bank.

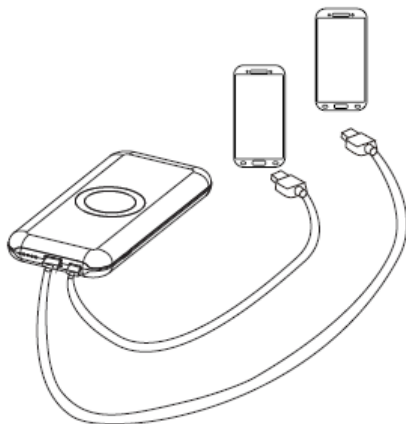

2. The devices will begin charging, with the LEDs operating per the above notes and table.

# Wireless Device Charging Instructions

## Notes:

- *Before charging your devices for the first time, first fully charge the power bank.*
- *Phone cases thicker than 5 mm may result in slower charging speeds.*
- *Magnetic or metal attachments will prevent charging.*
- *Compatible with Apple iPhone XS Max/XR/XS/X/8/8 Plus and Samsung Galaxy S10/S10 Plus/S10E/S9/S9 Plus/S8/S8 Plus/Note 9/Note 8/S7/S7 Edge/S6 Edge Plus/Note 5.*

- 1.** To enable wireless charging, press the power button located on the side of the power bank. The LEDs will then illuminate to indicate the power bank's remaining battery capacity. The Smart LED will turn solid red.
- 2.** Place your Qi-compatible device on the wireless charging bank.



## Notes:

- *If no device is placed on the wireless charging pad after 15 seconds, the unit will automatically turn off.*
- *Both USB ports will be inoperable when wireless charging is enabled. The USB-C port will only support an input to charge on the power bank.*

## Wireless Device Charging Instructions

- 3. (Optional)** To achieve high-speed charging capabilities (up to 7.5W for Apple devices and 10W for Samsung devices), use the included USB 2.0 Type-C to Type-A cable to connect the wireless power bank to a Quick Charge (QC) 2.0 or 3.0 USB power adapter.



- 4.** The Smart LED will blink blue to indicate the device is charging.
- 5.** Once the device is fully charged, the Smart LED will turn red. Remove your device from the wireless charging pad.

**Note:** If an error occurs or a non-compatible device is being used, the LED will flash red.



## Specifications

Input	USB Type-C (5V/2A or 9V/1.1A)
Output	USB Type-C (5V/3)
	USB Type-A (5V/2A)
	Wireless Charger Pad (5W/7.5W/10W)
Unit Dimensions	6.60 x 2.98 x 0.72 in. (16.76 x 7.57 x 1.83 cm)
Unit Weight	0.61 lb. (0.28 kg)
Operating Temperature Range	32°F to 95°F / 0°C to 35°C
Storage Temperature Range	-4°F to 158°F / -20°C to 70°C
Operating Humidity Range	0% to 90% RH, Non-Condensing
Storage Humidity Range	5% to 95% RH, Non-Condensing
Wireless Switch Frequency	87K-205K
Certifications	CE, FCC, UN38.3

# Warranty and Product Registration

## 1-Year Limited Warranty

TRIPP LITE warrants its products to be free from defects in materials and workmanship for a period of one (1) year from the date of initial purchase. TRIPP LITE's obligation under this warranty is limited to repairing or replacing (at its sole option) any such defective products. To obtain service under this warranty, you must obtain a Returned Material Authorization (RMA) number from TRIPP LITE or an authorized TRIPP LITE service center. Products must be returned to TRIPP LITE or an authorized TRIPP LITE service center with transportation charges prepaid and must be accompanied by a brief description of the problem encountered and proof of date and place of purchase. This warranty does not apply to equipment, which has been damaged by accident, negligence or misapplication or has been altered or modified in any way.

EXCEPT AS PROVIDED HEREIN, TRIPP LITE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Some states do not permit limitation or exclusion of implied warranties; therefore, the aforesaid limitation(s) or exclusion(s) may not apply to the purchaser.

EXCEPT AS PROVIDED ABOVE, IN NO EVENT WILL TRIPP LITE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS PRODUCT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Specifically, TRIPP LITE is not liable for any costs, such as lost profits or revenue, loss of equipment, loss of use of equipment, loss of software, loss of data, costs of substitutes, claims by third parties, or otherwise.

## Product Registration

Visit [tripplite.com/warranty](http://tripplite.com/warranty) today to register your new Tripp Lite product. You'll be automatically entered into a drawing for a chance to win a FREE Tripp Lite product!\*

\* No purchase necessary. Void where prohibited. Some restrictions apply. See website for details.

# Warranty and Product Registration

## FCC Notice, Class B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications to this equipment not expressly approved by Tripp Lite could void the user's authority to operate this equipment.

## WEEE Compliance Information for Tripp Lite Customers and Recyclers (European Union)



Under the Waste Electrical and Electronic Equipment (WEEE) Directive and implementing regulations, when customers buy new electrical and electronic equipment from Tripp Lite they are entitled to:

- Send old equipment for recycling on a one-for-one, like-for-like basis (this varies depending on the country)
- Send the new equipment back for recycling when this ultimately becomes waste

## Warranty and Product Registration

Use of this equipment in life support applications where failure of this equipment can reasonably be expected to cause the failure of the life support equipment or to significantly affect its safety or effectiveness is not recommended.

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos and illustrations may differ slightly from actual products.



1111 W. 35th Street, Chicago, IL 60609 USA • [triplite.com/support](http://triplite.com/support)