


8.6kW 3-Phase Monitored PDU, 208/120V Outlets (36 C13, 6 C19, 3 5-15/20R), L21-30P, 6ft Cord, 0U Vertical, TAA

MODEL NUMBER: PDU3VN6L2130

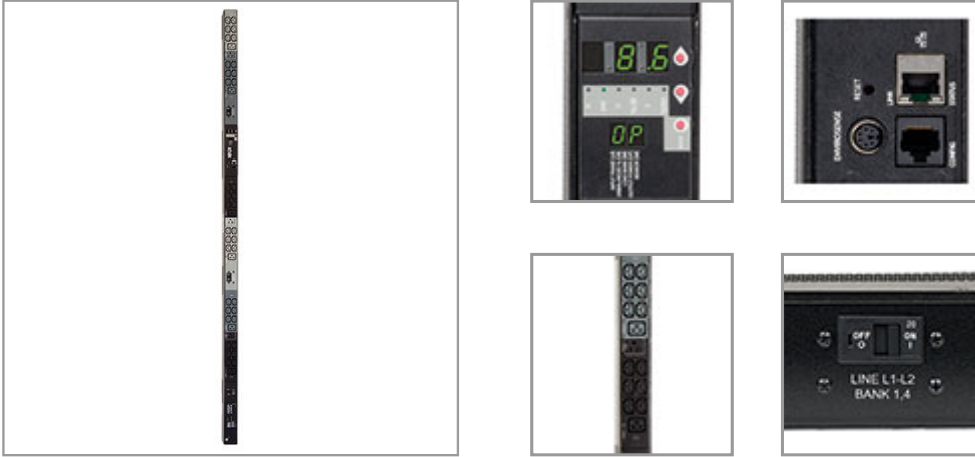

Description

Tripp Lite 3 phase Monitored PDU / Power Distribution Unit offers real-time remote monitoring of voltage and load levels via built-in network connection. PowerAlert interface supports custom notification of user-specified remote conditions via email, secure web, SNMP, Telnet or SSH interface. PDU output current consumption in amps is displayed per-phase via front panel lighted digital display and can be monitored remotely to warn of potential overloads before critical IT mains breakers trip.

Features

- 8.6kW 3 phase 208V input / 208 & 120V output Monitored Power Distribution Unit / PDU with built-in web/network interface
- Attached NEMA L21-30P 30A 200-240V 3 phase input plug with 6 ft. / 1.8m cord
- 0U, 70 in. / 178cm vertical form factor supports installation in 2 or 4 post equipment racks
- 45 total outlets (208V: 36 C13, 6 C19; 120V: 3 NEMA 5-15/20R) arranged in three breakered single phase output load banks
- Network interface provides PDU data regarding input voltage and per-phase load levels with +/-1% billing-grade accuracy
- Lighted display with scroll-button reports power consumption in amps for all 3 loading banks, IP-address self-identification and 180 degree display rotation for overhead or raised floor power feeds
- Built-in SNMP/ethernet interface reports voltage and PDU loading per-phase via network or secure web browser interface with options for user specified alarm and notification thresholds
- Supports in-rack environmental reporting with optional ENVIROSENSE temperature / humidity sensor and rack access notification with up to 4 optional SRSWITCH door sensors
- DHCP/Manual configuration support
- 10/100 Mbps auto-sensing allows optimal communication with 10/100 Base-T networks
- Real-time clock backup maintains the time of day and date even if the PDU is unpowered
- Tiered access privileges allow an administrator and a guest to login via web browser for monitoring
- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements

Highlights

- Monitored 8.6kW 3 Phase 208V input / 208 & 120V output PDU in 70 in. / 178cm 0U vertical mounting format
- Reports voltage and load per-phase via built in ethernet interface
- 1% billing-grade accuracy, Multi-function digital display, Environmental monitoring options
- NEMA L21-30P 30A 208V 3 phase input; 6 ft. / 1.8m line cord
- 36 C13 & 6 C19 (208V) & 3 NEMA 5-15/20R (120V) single phase outlets; Plug-lock cable retention sleeves
- TAA Compliant

Package Includes

- Monitored rackmount PDU with pre-installed mounting buttons
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included set of plug-lock inserts keep C14 & C20 power cords solidly connected to PDU outlets
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

Specifications

| OVERVIEW | |
|-----------------------------------|--|
| UPC Code | 037332180995 |
| PDU Type | Monitored |
| INPUT | |
| Input Phase | 3-Phase |
| Recommended Electrical Service | 30A 208V with L21-30R outlet |
| Maximum Input Amps | 24 |
| Maximum Input Amps Details | Agency de-rated to 24A continuous |
| PDU Plug Type | NEMA L21-30P |
| Input Cord Length (ft.) | 6 |
| Input Cord Length (m) | 1.83 |
| OUTPUT | |
| Output Capacity Details | 8.6kW (208V) total capacity; 13.9A max per breakered outlet bank; 12A max per C13 outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacle Details | 5-15/20R outlets provide 120V output; C13 and C19 outlets provide 208V output |
| Output Receptacles | (3) 5-15/20R; (36) C13; (6) C19 |
| Output Nominal Voltage | 120; 208 |
| Overload Protection | 3 20A circuit breakers, one per output load bank |
| USER INTERFACE, ALERTS & CONTROLS | |
| Reported Load Segments | Supports monitoring of input current per phase (L1, L2, L3) and output current for each output load bank (B1-B6); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black C13/C19 outlets (B1); L2-L3 feeds dark-gray C13/C19 outlets (B2); L3-L1 feeds light-gray C13/C19 outlets (B3); L1-N feeds black 5-20R outlet (B4); L2-N feeds dark-gray 5-20R outlet (B5); L3-N feeds light-gray 5-20R outlet (B6) |
| Front Panel LCD Display | Large digital display reports Amperage, Kilowatts, Voltage, Unbalance percentage, Temperature* and Humidity* information (*requires ENIVIROSENSE option); Small digital display provides detail on the measurement the large display is reporting: Input-phase (L#), Load bank (B#), Sensor (S#), Load unbalance (UB), Output power (OP) |
| Front Panel LEDs | Set of 6 LEDs identify the value displayed on the large digital display: Amperage (A), Kilowatts (kW), Voltage (V), Unbalance percentage (%UB), Temperature (T), Humidity (%RH); 3 additional multi-color LEDs offer power availability information for each pair of output load banks (Bank 1&4 / Bank 2&5 / Bank 3&6): GREEN (<80% load), YELLOW (>80% load), RED (Power OFF), RED FLASHING (Power OFF/breaker trip) |



Powering Business Worldwide



| | |
|--------------------------------------|--|
| Switches | Set of UP/DOWN arrow buttons scroll through available Input, Bank, Power, Load balance and Sensor options; Additional MODE button advances the LEDs to view the next measurement |
| Current Measurement Accuracy (Amps) | +/-1% |
| Voltage Measurement Accuracy (Volts) | +/-1% |
| Power Measurement Accuracy (Watts) | +/-1% |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Metal |
| Form Factors Supported | Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 6.30 x 9.70 x 75.80 |
| Shipping Dimensions (hwd / cm) | 16.00 x 24.64 x 192.53 |
| Shipping Weight (lbs.) | 23.80 |
| Shipping Weight (kg) | 10.80 |
| Unit Dimensions (hwd / in.) | 70.000 x 2.170 x 2.520 |
| Unit Dimensions (hwd / cm) | 177.8 x 5.5 x 6.4 |
| Unit Weight (lbs.) | 13.50 |
| Unit Weight (kg) | 6.12 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 32 to 122F (0C to 50C) |
| Storage Temperature Range | -30°C to +60°C (-22°F to +140°F) |
| Relative Humidity | 5-95% non condensing |
| Operating Elevation | 0-10,000 |
| COMMUNICATIONS | |
| PowerAlert Software | SNMPWEBCARD Interface: PowerAlert 12 |
| Communications Cable | RJ45-to-DB9 configuration/console Access cable |
| Network Compatibility | 10 Mbps; 100 Mbps (Fast Ethernet) |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |



Powering Business Worldwide



1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.